


San Antonio Water System Standard Specifications for Construction

**ITEM NO. 869
PROJECT SIGNS**

- 869.1** **DESCRIPTION:** This item shall consist of providing, installing, maintaining and removing two 4' X 8' project signs (at the completion of the project). The signs shall conform to the configuration and details indicated in Drawing No. DD-845-02. These signs shall be installed at locations to be determined by the Project Engineer. Any additional signs required by other agencies (such as the City of San Antonio Public Works' Right-ofWay Management Plan) shall also be installed wherever necessary.
- 869.2** **MATERIAL:** The signs shall be made of ¾" plywood, grade A-C or better and each shall be mounted on two 4" X 4" X 12'-0" posts.
- 869.3** **INSTALLATION:** The installation will require embedding all posts a minimum of 3'-0" below the ground.
- 869.4** **PAYMENT:** No direct payment will be made to the contractor for the work and materials required in providing, installing, maintaining and removing the signs. Such work and materials shall be considered subsidiary to the several items of work for which unit prices are provided in the proposal.


<p><u>PROJECT:</u></p> <p><u>COST:</u></p> <p><u>ENGINEER:</u></p> <p><u>CONTRACTOR:</u></p>	<p><u>JOB NO:</u></p>
<p>For Information Call</p> <p>233-3500 (Business Hours) or 704-SAWS (After Hours)</p>	



ons

Notes:

- Two logos (with lettering) and sign border are SAWS blue
- All other lettering is black (sized to fit space)
- 4' x 8' sheet of 3/4" plywood, Grade A-C
- Signs to be placed in prominent location along a major thoroughfare within the project limits

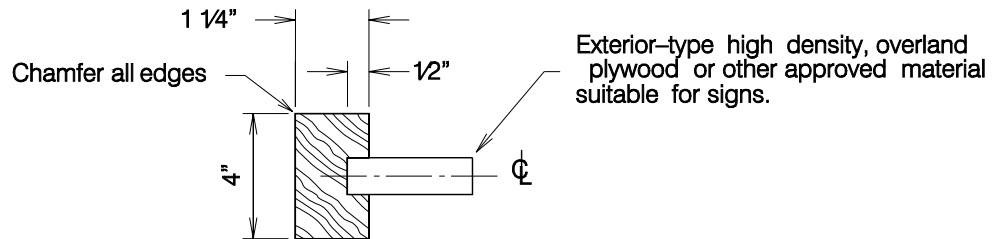

SECTION A-A

Exterior-type high density, overlaid plywood or other approved material suitable for signs.

PROPERTY OF SAN ANTONIO WATER SYSTEM SAN ANTONIO, TEXAS	PROJECT SIGN FOR SAWS CONSTRUCTION	APPROVED	REVISED
		JANUARY 2005	
		DD-869-01	SHEET <u>1</u> OF <u>1</u>